COLFAX Fluid Handling

Charact. curves
NI 65-160/01

Quotation / Offer No.

Project ID

Charact. curves acc. **DIN EN ISO 9906** Class 2
Admissible minmum capacity 10 % * Q(opt) at continous operation
Remarks:

Item:
Pos.No:

Created by
GR-B, -

Date
2012-12-12

Power data referred to: **Water, pure**

	Q	H	P	Vis	Temp	Density	rated Torque
1)				1,0 mm²/s	20,0 °C	1,00 kg/dm³	
2)							

Speed
1450 1/min

NPSH-value without safety margins

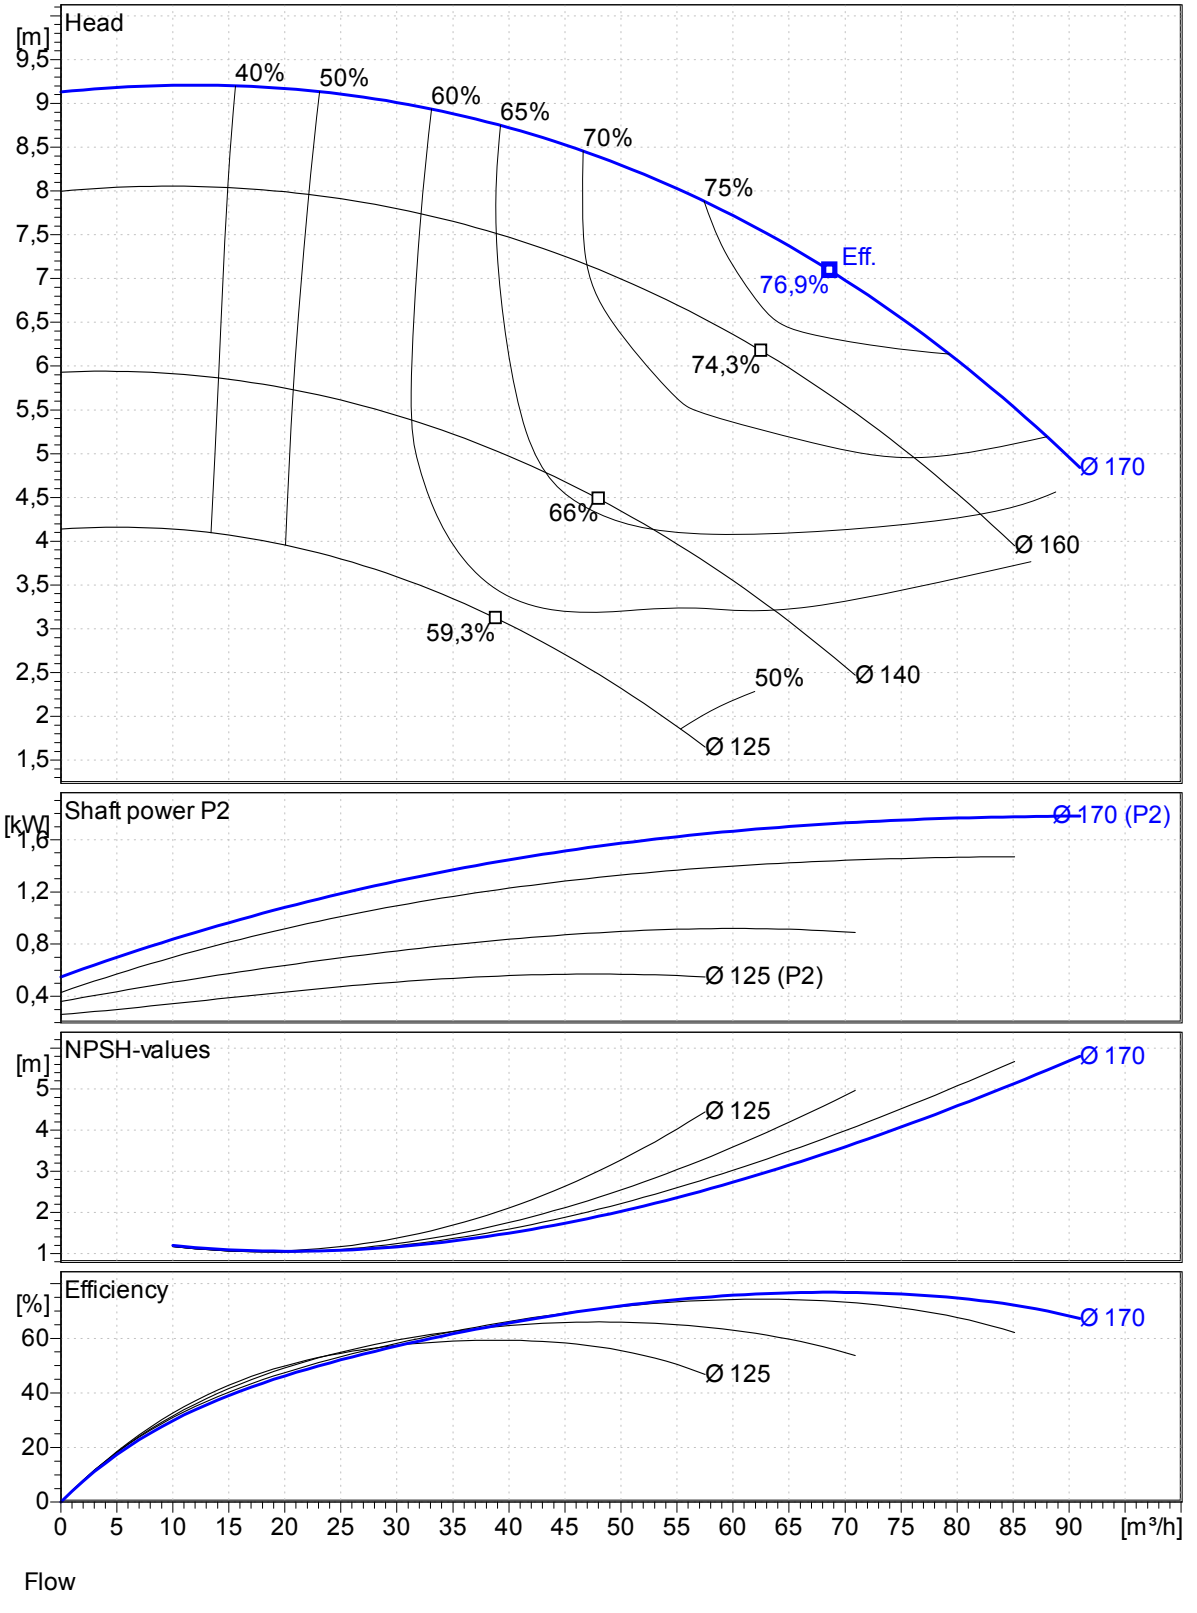

COLFAX Fluid Handling	Charact. curves **NI 65-160/01**	Quotation / Offer No. Project ID

Charact. curves acc. **DIN EN ISO 9906** Class 2
Admissible minmum capacity 10 % * Q(opt) at continous operation
Remarks:

Item:
Pos.No:

Created by GR-B, -

Date **2012-12-12**

Power data referred to: **Water, pure**

	Q	H	P	Vis	Temp	Density	rated Torque
1)				1,0 mm²/s	20,0 °C	1,00 kg/dm³	
2)							

Speed
2900 1/min
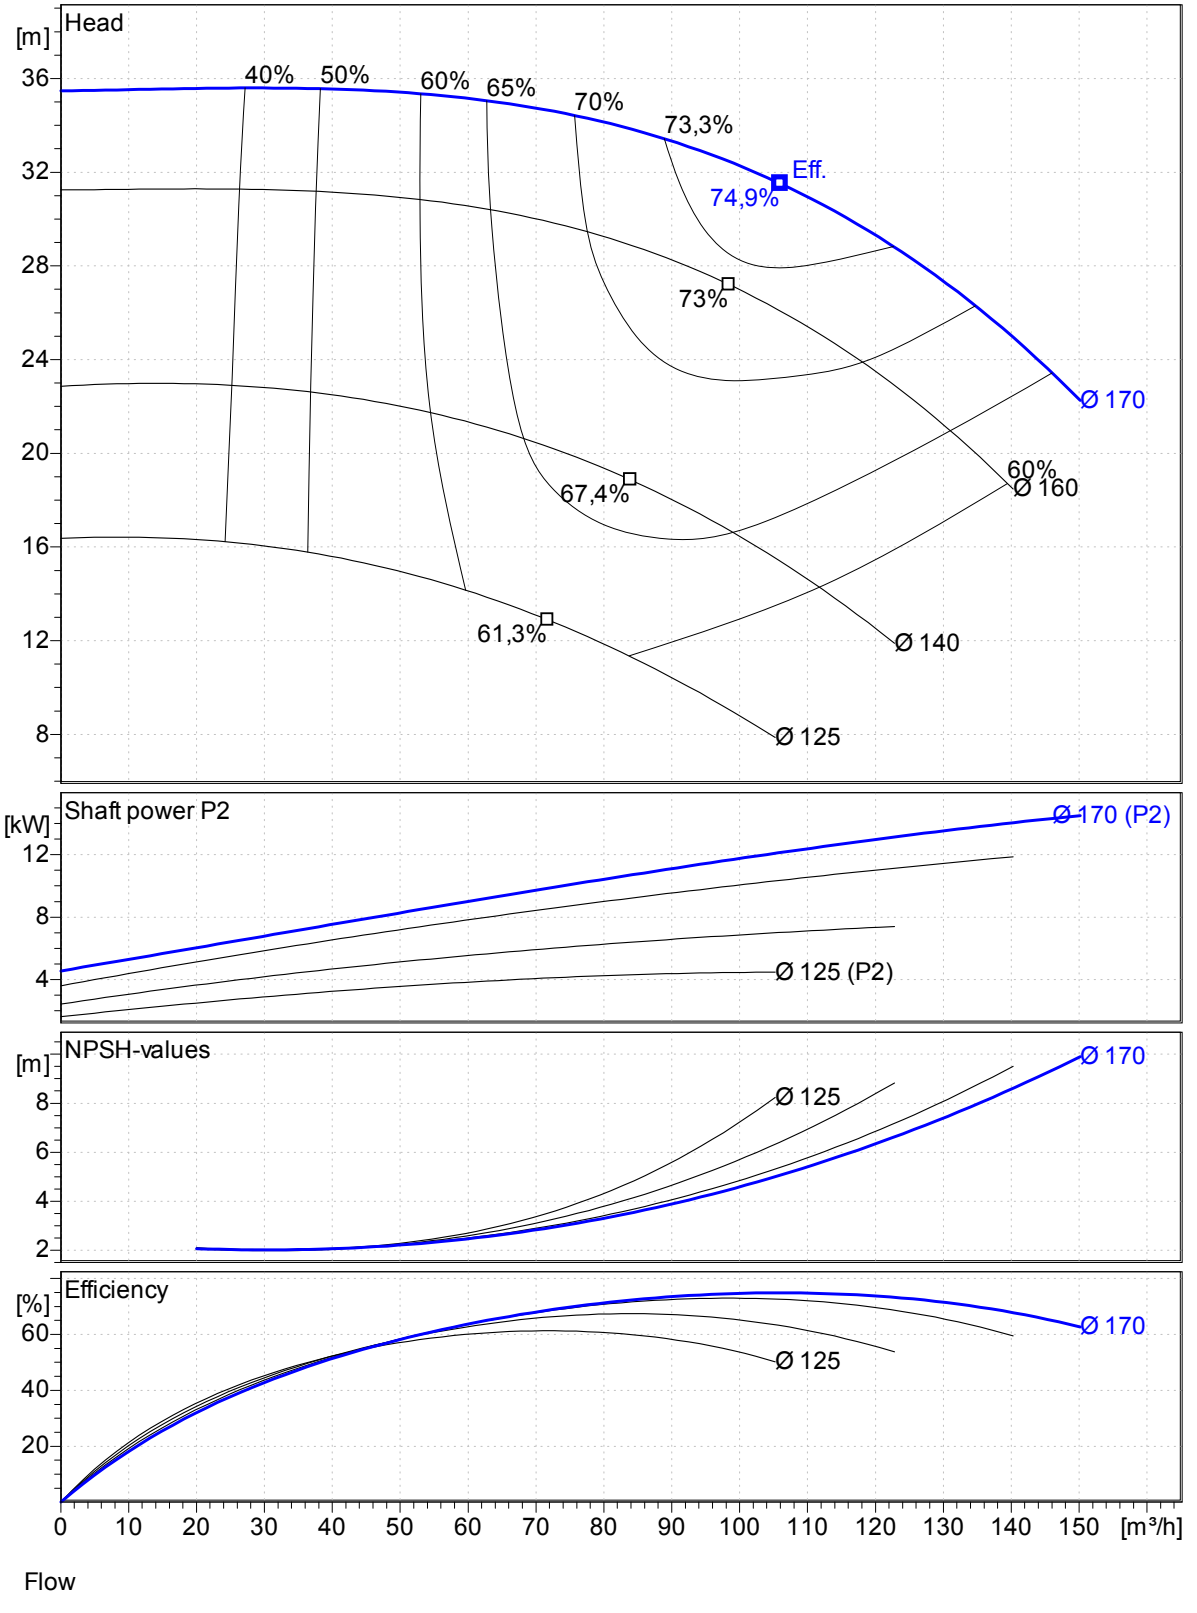
NPSH-value without safety margins